

Specifications for Approval

Customer Part No.:

JOINHANDS Part No.: JH-CMRBG19GTP005

Part Name: 3010 红蓝双色 LED

Spec Issue Date:2019-01-09

Revision No.: A0

=====

To Customer:

1. Accessory: Samples Samples Data
2. Customer's Proposal : Agree Disagree

Reason :

| | | |
|------------------|--------------|---------------|
| Draw by : | Checked by : | Approved by : |
| 李飞 | 卢伟昌 | 钟志鸿 |
| Customer Approve | | |
| | | |



广东晶瀚光电科技有限公司
GUANGDONG JOINHANDS Optoelectronics Technology Co.,Ltd
]地址:东莞市寮步镇塘边社区华南工业城金富路 13 号
鼎昊自动化孵化园 2 区 B 栋 101 号
Tel:0769-82233086 Fax:0769-82233606
<http://www.joinhands-cn.com>
E-mail: hanser.yu@joinhands-cn.com

Features

3.0mm X 1.0mm SMD LED, 1.4mm thickness

Low power consumption

Wide view angle

Package: 3000pcs/reel





RoHS Compliant

Applications


Ideal for back light and indicator

Various colors and lens types available

Package outlines

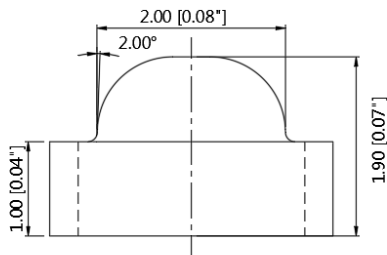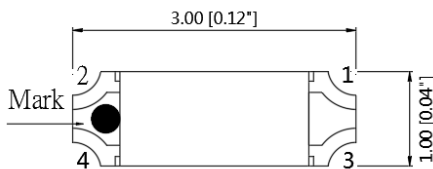

Recommend Pad Layout

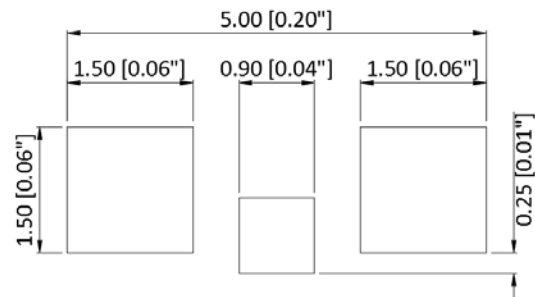

| Part No. | Emitted color | Dice | Lens color |
|------------------|---------------|-----------|-------------------|
| JH-CMOBG19GTI028 | Red | AlGaInP | Water transparent |
| | Green | InGaN/GaN | |

Notes:

1. All dimensions are in millimeters (inches);
2. Tolerances are $\pm 0.1\text{mm}$ (0.004inch) unless otherwise noted.

Absolute Maximum Ratings (Ta=25°C)


| Parameter | Symbol | Value | | Unit |
|--|--------|----------|-----|------|
| | | R | B | |
| Forward current | If | 30 | | mA |
| Reverse voltage | Vr | 5 | | V |
| Power dissipation | Pd | 72 | 111 | mW |
| Operating temperature | Top | -40 ~+85 | | °C |
| ESD(Human-body mode) | -- | 4 | 2 | KV |
| Storage temperature | Tstg | -40 ~+85 | | °C |
| Peak pulsing current (1/8 duty f=1kHz) | Ifp | 125 | | mA |

Electro-Optical Characteristics (Ta=25°C)

| Parameter | Test Condition | Symbol | Value | | | Unit |
|-----------------------------|----------------|-------------------|-------|-----|-----|---------|
| | | | Min | Typ | Max | |
| Wavelength at peak emission | If=20mA | R | -- | 615 | -- | nm |
| | | λ_p B | -- | 465 | -- | |
| Spectral half bandwidth | If=20mA | R | -- | 20 | -- | nm |
| | | $\Delta\lambda$ B | -- | 25 | -- | |
| Dominant wavelength | If=20mA | R | 620 | -- | 630 | nm |
| | | λ_d B | 465 | -- | 475 | |
| Forward voltage | If=20mA | R | 1.8 | -- | 2.4 | V |
| | | Vf B | 2.8 | -- | 3.7 | |
| Luminous intensity | If=20mA | R | 80 | 140 | 200 | mcd |
| | | Iv B | 80 | 120 | 200 | |
| Viewing angle at 50% Iv | If=10mA | 2 θ 1/2 | -- | 120 | -- | Deg |
| Reverse current | Vr=5V | Ir | -- | -- | 10 | μ A |


Relative Spectral Emission (Red)

IF=20mA, Ta=25°C

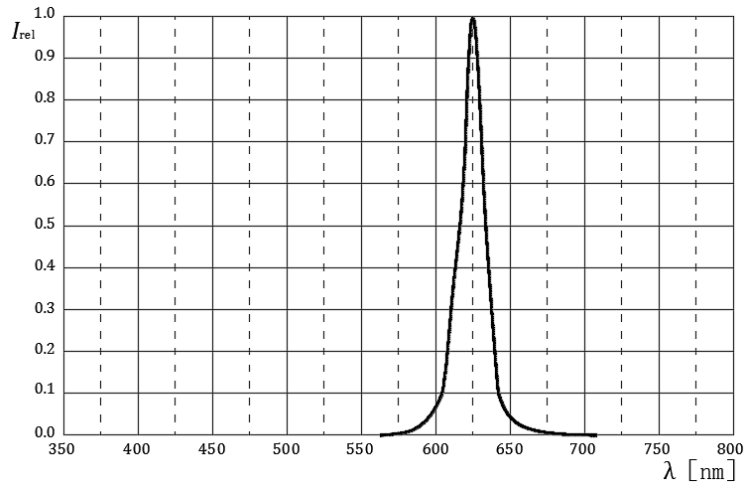



Radiation Characteristics

IF=10mA, Ta=25°C

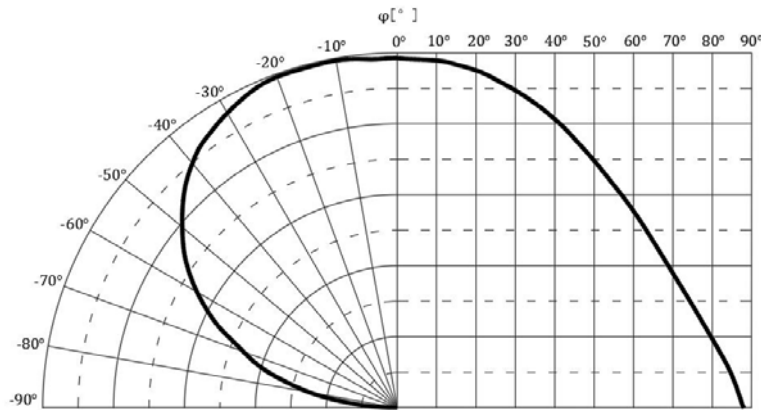


Forward Current vs Forward Voltage Forward Current Derating Curve

Ta=25°C

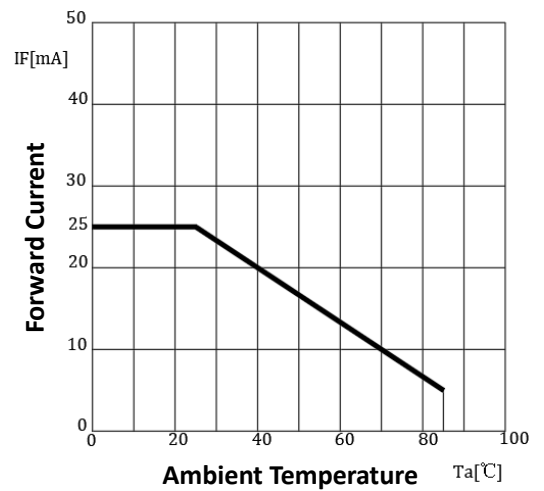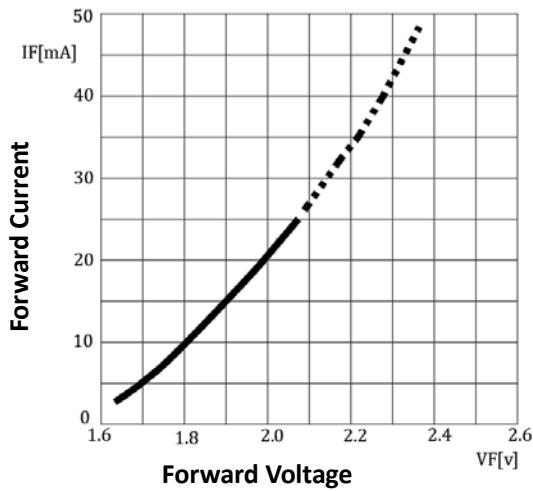


Relative Spectral Emission (Blue)

IF=20mA, Ta=25°C

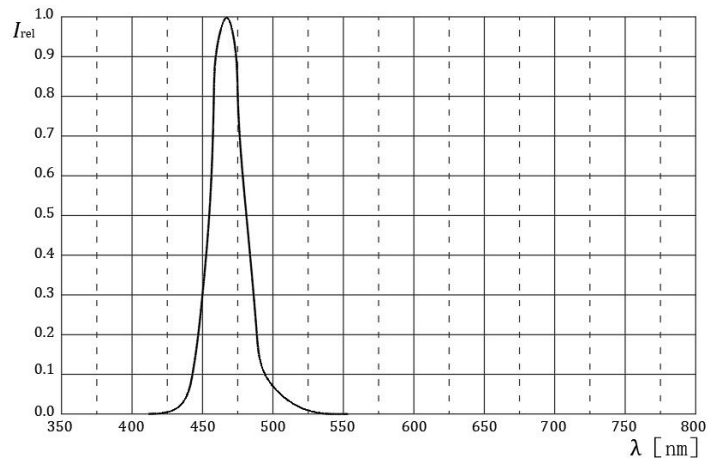



Radiation Characteristics

IF=10mA, Ta=25°C

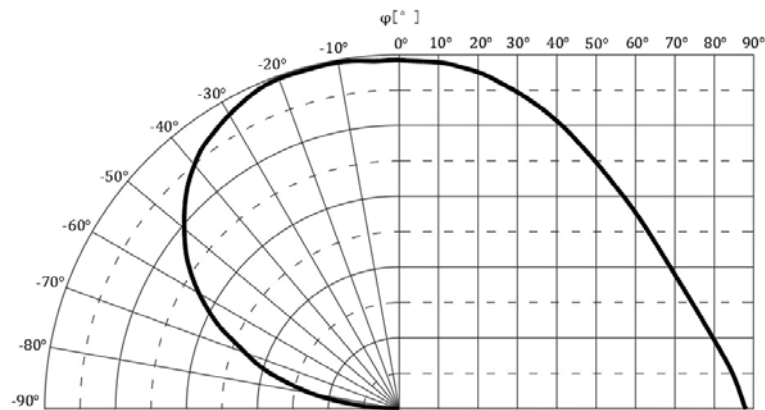


Forward Current vs Forward Voltage Forward Current Derating Curve

Ta=25°C

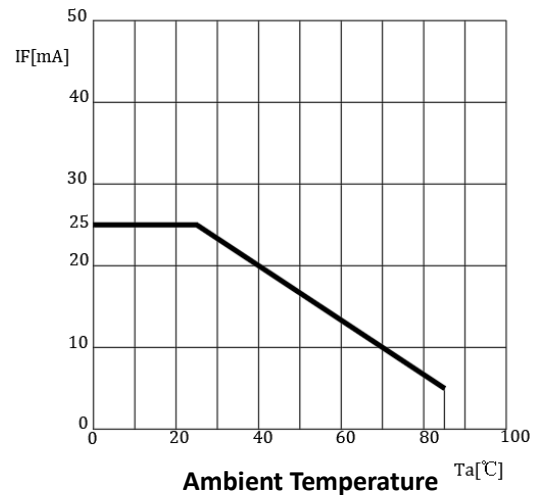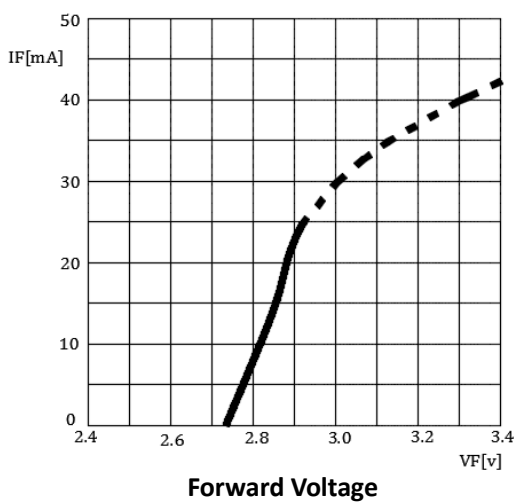

Reflow Profile

■ Reflow Temp/Time

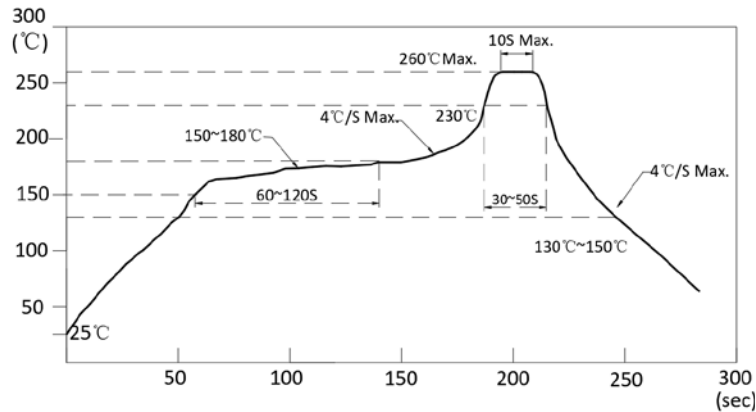

Notes:


1. We recommend the reflow temperature 245°C(±5°C).The maximum soldering temperature should be limited to 260°C.
2. Don't cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.

■ Soldering iron

Basic spec is ≤ 5sec when 320°C(±20°C). If temperature is higher, time should be shorter(+10°C → -1sec). Powerdissipation of iron should be smaller than 20W, and temperatures should be controllable. Surface temperature of the device should be under 350°C.

■ Rework

1. Customer must finish rework within 5 sec under 340°C.
2. The head of iron cannot touch copper foil
3. Twin-head type is preferred.

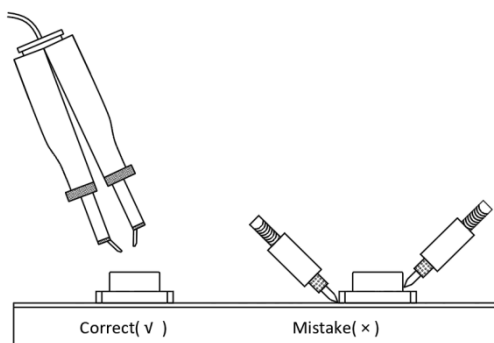


- Avoid rubbing or scraping the resin by any object, during high temperature, for example reflow solder etc.

Handling precautions

1. Drive Method

A LED is a current-operated device. In order to ensure intensity uniformity on multiple LEDs connected in parallel in an application, it is recommended that a current limiting resistor be incorporated in the drive circuit, in series with each LED as shown in Circuit below.

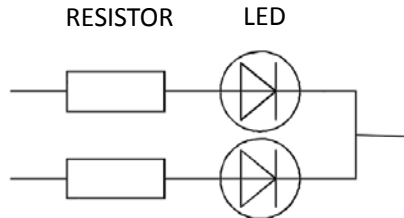

2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30°C or less and 60% RH or less.
- 2.3 After the package is opened, the products should be used within a week or they should be kept to store at $\leq 20^{\circ}\text{C}$ with zip

3. Baking

It is recommended to baking before soldering when the pack is unsealed after 72hrs. The Conditions are as followings:

- 3.1 $60\pm 3^{\circ}\text{C}$ x(12~24hrs) and $< 5\% \text{RH}$, taped reel type
- 3.2 $100\pm 3^{\circ}\text{C}$ x(45min~1hr), bulk type
- 3.3 $130\pm 3^{\circ}\text{C}$ x(15~30min), bulk type

Test Items and Results of Reliability

| Test Item | Test Conditions | Standard Test Method | Note | Number of Test |
|---|---|----------------------|-----------|----------------|
| Reflow Soldering | Ta=260±5℃,Time=10±2S | JB/T 10845-2008 | 3times | 0/22 |
| Salt Atmosphere | Ta=35±3℃,PH=6.5~7.2 | GB/T 2423.17-2008 | 24hrs | 0/22 |
| Temperature Cycling | -40±5℃ 30±1min ↑→(25℃/5±1min)↓ 100±5℃ 30±1min | GB/T 2423.22-2012 | 100cycles | 0/22 |
| Thermal Shock | Ta=-40±5℃~100±5℃, 15±1min dwell | GB/T 2423.22-2012 | 100cycles | 0/22 |
| High Humidity High Temp. Cycling | Ta=30±5℃~65±5℃, 90±5%RH,24hrs/1cycle | GB/T 2423.4-2008 | 10cycles | 0/22 |
| High Humidity High Temp. Storage Life | Ta=85±5℃,ψ(%)=85±5%RH | GB/T 2423.3-2006 | 1000hrs | 0/22 |
| High Temperature Storage Life | Ta=100±5℃,non-operating | GB/T 2423.2-2008 | 1000hrs | 0/22 |
| Low Temperature Storage Life | Ta=-40±5℃,non-operating | GB/T 2423.1-2008 | 1000hrs | 0/22 |
| Life Test | Ta=26±5℃,@20mA, ψ(%)=25%RH~55%RH | -- | 1000hrs | 0/22 |
| High Humidity High Temp. Operating Life | Ta=85±5℃,@20mA, ψ(%)=85%RH | GB/T 2423.3-2006 | 500hrs | 0/22 |
| Low Temperature Operating Life | Ta=-20±5℃,@20mA | GB/T 2423.1-2008 | 1000hrs | 0/22 |

Forward Voltage Rank Combination (IF=20mA)

| Rank | | Min. | Max. | Unit |
|--------|---|------|------|------|
| Orange | □ | 1.8 | 2.4 | V |
| | f | 2.8 | 3.1 | |
| Blue | g | 3.1 | 3.4 | |
| | h | 3.4 | 3.7 | |

Luminous Intensity Rank Combination (IF=20mA)

| Rank | | Min. | Max. | Unit |
|--------|---|------|------|------|
| Orange | I | 80 | 100 | mcd |
| | J | 100 | 125 | |
| | K | 125 | 160 | |
| | L | 160 | 200 | |
| Blue | I | 80 | 100 | |
| | J | 100 | 125 | |
| | K | 125 | 160 | |
| | L | 160 | 200 | |

Dominant wavelength Rank Combination (IF=20mA)

| Rank | | Min. | Max. | Unit |
|--------|---|-------|-------|------|
| Orange | t | 620 | 625 | nm |
| | u | 625 | 630 | |
| Blue | G | 465 | 467.5 | |
| | H | 467.5 | 470 | |
| | I | 470 | 472.5 | |
| | J | 472.5 | 475 | |

Group Name on Label (Example DATA: □KtFKH 20)


| DATA: □KtFKH 20 | | Vf(V) | Iv (mcd) | λd (nm) | Test Condition |
|-----------------|----------|---------|----------|-----------|----------------|
| Orange | □→K→t→20 | 1.8~2.4 | 125~160 | 620~625 | IF=20mA |
| Blue | f→K→H→20 | 2.8~3.1 | 125~160 | 467.5~470 | |

Notes:


1. The tolerance of luminous intensity (Iv)is $\pm 15\%$.
2. The tolerance of dominant wavelength is $\pm 1\text{nm}$.
3. This specification is preliminary.
4. This specification is a standard specification of our factory, can make in accordance with customer's special requirement.

3010 Series SMD Chip LED Lamps Packaging Specifications


● **Feeding Direction**

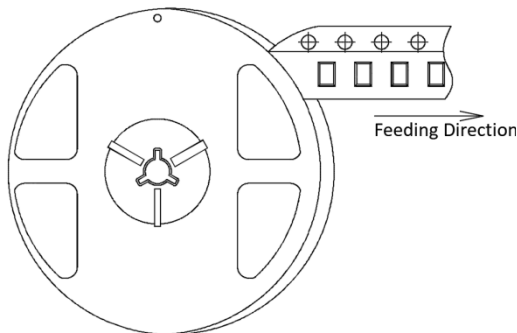


● **Dimensions of Reel (Unit: mm)**

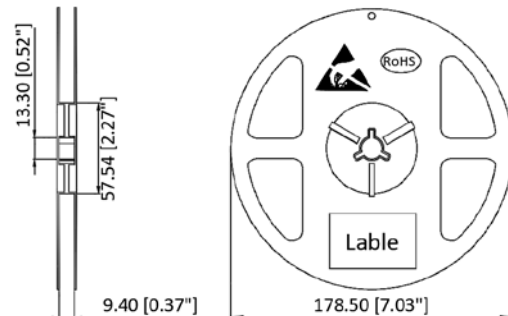

● **Dimensions of Tape (Unit: mm)**

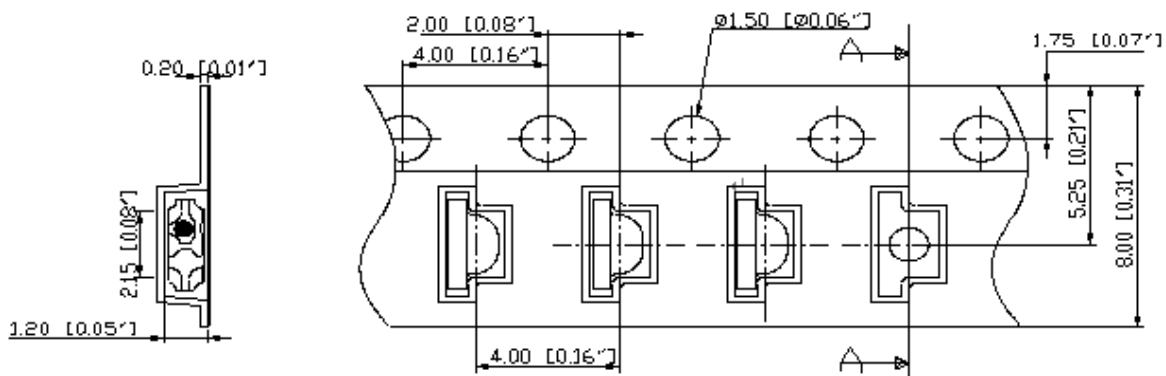

● **Arrangement of Tape**

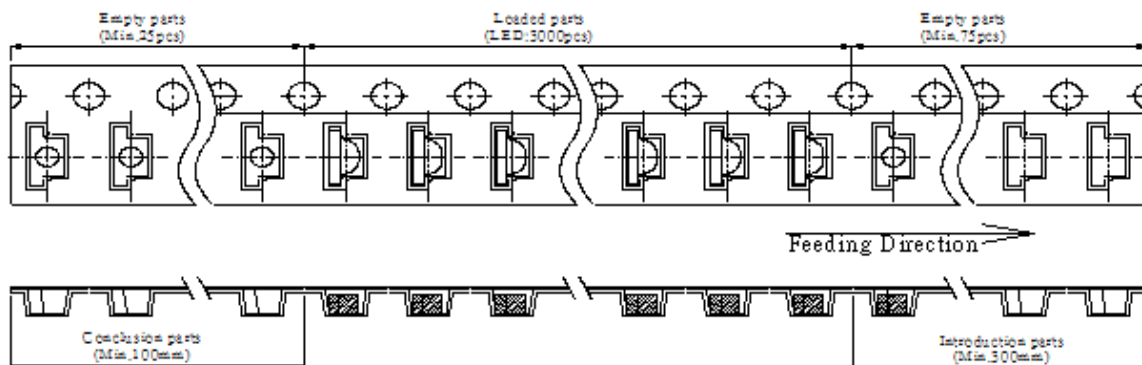

Notes:

1. Empty component pockets are sealed with top cover tape;
2. The maximum number of missing lamps is two;
3. The cathode is oriented towards the tape sprocket hole in accordance with ANSI/EIA RS-481 specifications.
4. 3,000pcs/Reel.


3010 Series SMD Chip LED Lamps Packaging Specifications

- Label Explanation



CPN:Customer's Product Number
P/N:Product Number
QTY:Packing Quantity
LOT NO:Lot Number
VF:Forward Voltage Rank
IV:Luminous Intensity Rank
WLD:Dom. Wavelength Rank
BIN:BIN Code
DATE:Date Of Dispatch

- Transportation Packing

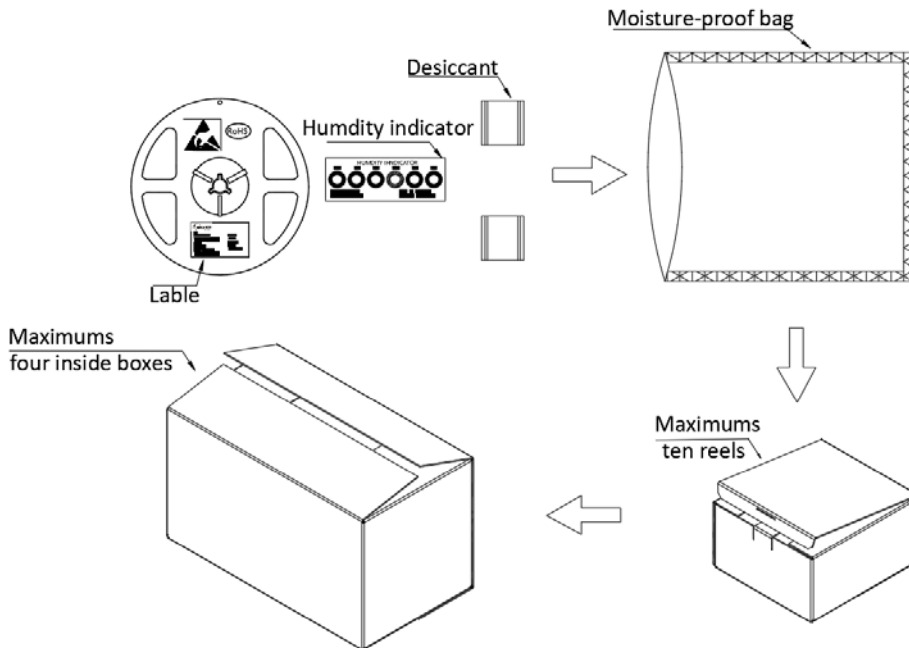

Notes:

Reeled products (numbers of products are 3,000pcs) packed in a seal off moisture-proof bag along with two desiccant one by one, ten moisture-proof bag of maximums packed in an inside box (about size: 240x 220x 120mm) and four inside boxes of maximums are put in the outside box (about size: 460mm x 246mm x 250mm) Together with buffer material, and it is packed. The number of the loading steps of outsidebox (cardboard box) has it to three steps.